

Commercial-grade filtration at pin-drop noise level



Product specifications

	Pro600	Pro900
Dimensions	50 x 54 x 18 cm	61 x 61 x 21 cm
Weight	10.9 kg	13.5 kg
Room size*	45-125 m ²	80-200 m ²
Efficiency rate**	CADR 14/W	CADR 20/W
Mounting	Ceiling or floor	
Remote control	Yes	
Color	White	
Filter	EcoPrecision™ long-life filter	
Degree of filtration**	H14 level PM0,1 99,99% and PM0,3 99,99%	
Filter exchange interval	18 months	
Motor	Brushless AC-motor with HyBlade® technology from German ebmpapst GmbH	

Industry leadership

- Running costs
- Purification efficiency
- Noise levels

Key efficiency data

Fan speed	CADR** smoke		Noise dB (A)		Energy (W)	
	Pro600	Pro900	Pro600	Pro900	Pro600	Pro900
1	135	300	21	23	12	15
2 (daily use)	350	450	29	31	25	25
3	600	950	44	49	45	70

*based on 5-2 air changes per hour.

**as certified by Intertek Group according to standard ANSI/AHAM AC-1-2015.


Efficient filtration of

Microbes


Bacteria
Viruses
Mold

Other pollutants

Ultra-fine dust
Traffic pollution
Pollen
Printer particles
Smoke
Industrial pollution
Pet allergens

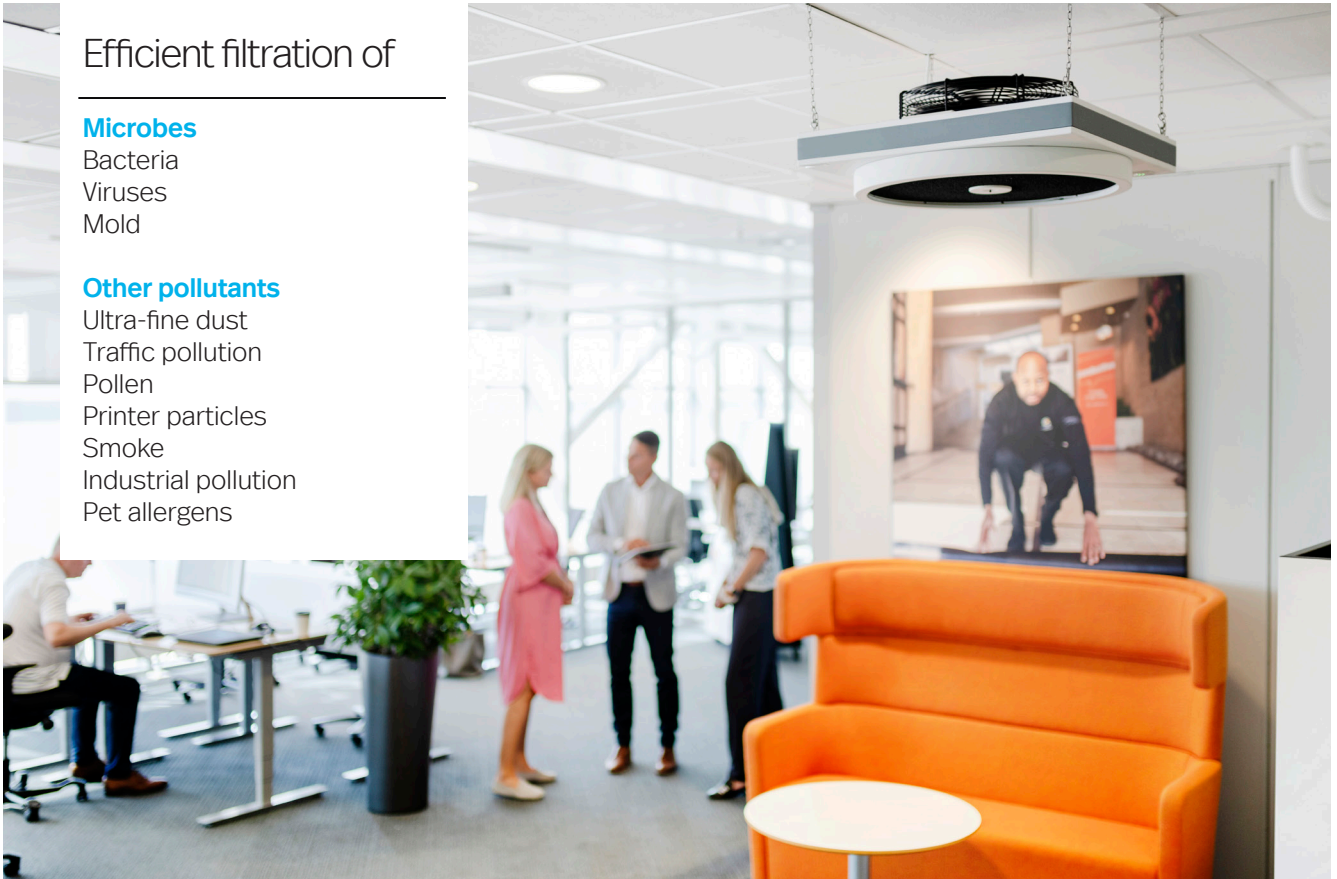

CellFlow technology

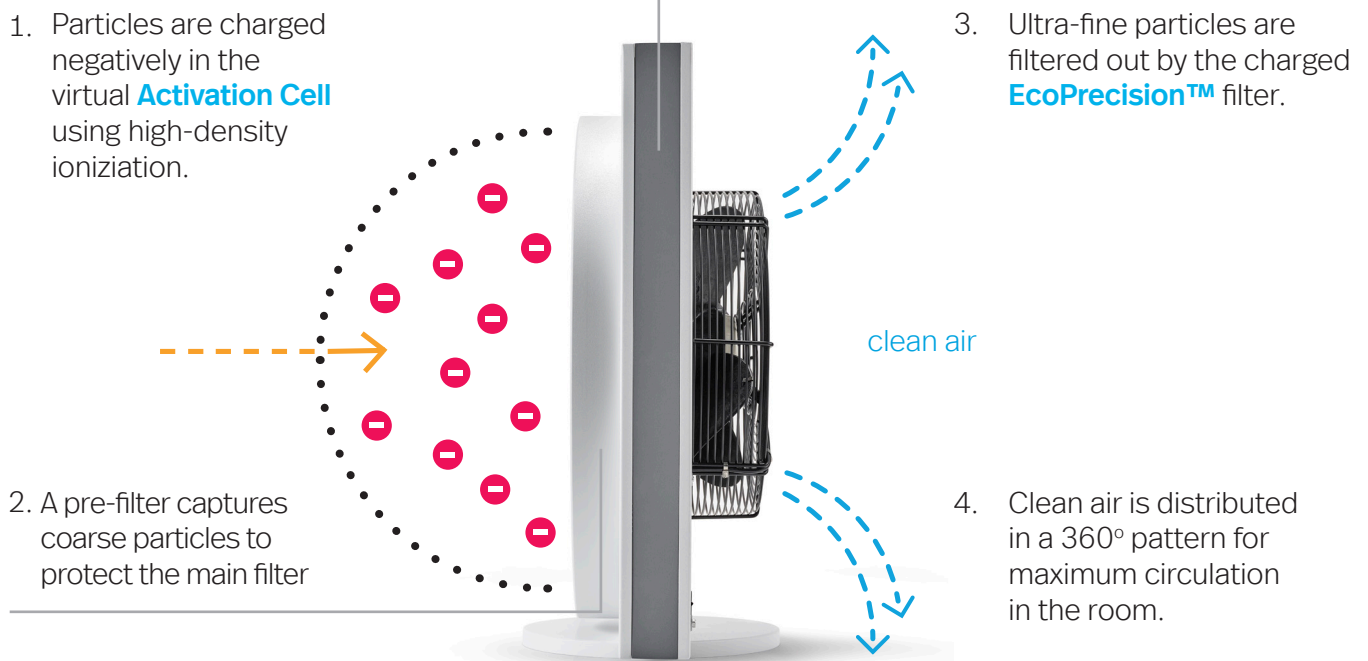

Watch video on how the CellFlow technology works.



LightAir

www.lightair.com/professional